

Owner: Phønix Tag Materialer A/S  
No.: MD-20009-EN\_rev2  
Revision: Rev2  
Issued first time: 22-04-2020  
Issued: 25-02-2022  
Valid to: 09-11-2025

3<sup>rd</sup> PARTY VERIFIED

**EPD**

VERIFIED ENVIRONMENTAL PRODUCT DECLARATION | ISO 14025 & EN 15804



**Owner of declaration**

Phønix Tag Materialer A/S  
Vester Allé 1  
6600 Vejen  
VAT no. 25711785



**Issued:**  
25-02-2022

**Valid to:**  
09-11-2025

**Programme**

EPD Danmark  
[www.epddanmark.dk](http://www.epddanmark.dk)



- Industry EPD  
 Product EPD

**Basis of calculation**

This EPD is developed in accordance with the European standard EN 15804+A2.

**Comparability**

EPDs of construction products may not be comparable if they do not comply with the requirements in EN 15804. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database.

**Validity**

This EPD has been verified in accordance with ISO 14025 and is valid for 5 years from the date of issue.

**Use**

The intended use of an EPD is to communicate scientifically based environmental information for construction products, for the purpose of assessing the environmental performance of buildings.

**Declared product(s)**

Two systems of PTM reinforced bitumen membrane for roof waterproofing:

- System 1: PTM BituFlex (top layer) & PTM DuraFlex Kombi (bottom layer)
- System 2: PTM BituFlex Kombi (top layer) & PTM DuraFlex (bottom layer)

Number of declared datasets/product variations: 2

**EPD type**

- Cradle-to-gate with modules C1-C4 and D  
 Cradle-to-gate with options, modules C1-C4 and D  
 Cradle-to-grave and module D  
 Cradle-to-gate  
 Cradle-to-gate with options

**Production site**

The production site is located in Vejen in Denmark.

**Product(s) use**

The EPD covers two product systems, which are intended for roof waterproofing.

**Declared or functional unit**

1 m<sup>2</sup> installed 2-layer roof waterproofing, from cradle-to-grave, with activities needed for a study period of 60 years for the building.

In addition, results are also displayed per a declared unit of 1 m<sup>2</sup> of produced waterproofing (toplayer + bottom layer) for cradle-to-gate as required by the reference PCR.

**Year of data**

2019, with updated supplier information in 2021.

**EPD version**

Revision 2, 25-02-2022: Updated with new supplier information, and with the addition of a second end-of-life scenario.

CEN standard EN 15804 serves as the core PCR

Independent verification of the declaration and data, according to EN ISO 14025

- internal  external

3. parts verifikator:



Guangli Du, Aalborg University, Denmark



Martha Katrine Sørensen  
EPD Danmark

**Life cycle stages and modules (MND = module not declared)**

Product			Construction process		Use								End of life				Beyond the system boundary
Raw material supply	Transport	Manufacturing	Transport	Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Re-use, recovery and recycling potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	

# Product information

## Product description

The main product components are shown in the table below.

Material	Weight-% of declared product
Bitumen	54-55%
SBS-polymer	4-5%
Reinforcement (polyester/glass fibre)	4%
Minerals as fillers and finishing	36-37%
Polypropylene film	<1%

## Representativity

This declaration, including data collection and the modeled foreground system including results, represents the cradle-to-grave, and module D, impact from two reinforced bitumen membrane systems for roof waterproofing. The production site is Vejen, Denmark. The product specific data, covering the production process and packaging of the products, as well as supplier location and information on inbound transport, has been collected for the year 2019. Allocation of manufacturing data was based on the bill of materials or allocated based on square metres. Background data are based on GaBi ts 9.2.1.68 incl. databases 2020 Edition, Ecoinvent 3.6 and an LCI profile from Eurobitume and are less than 10 years old.

## Picture of product(s)



## Hazardous substances

The product does not contain substances listed in the "Candidate List of Substances of Very High Concern for authorization" more than 0,1 weight %.

(<http://echa.europa.eu/candidate-list-table>)

## Essential characteristics (CE)

The elastomeric bitumen membranes are covered by harmonized technical specification DS/EN13707:2004+A2:2009. Declaration of performance according to EU regulation 305/2011 is available for all declared product variations.

Further technical information can be obtained by contacting the manufacturer or on the manufacturer's website:

<https://www.phonixtagmaterialer.dk/produkter/>

## Reference Service Life (RSL)

The reference service life of the building is set to 60 years in accordance with the reference PCR.

The waterproofing systems are expected to fulfill their function for 50 years. One replacement has been accounted for in order to maintain the function during the 60-year study period of the building.

# LCA background

## Functional Unit

The LCI and LCIA results in this EPD relates to a functional unit for the two product systems (top layer + bottom layer) defined as: "1 m<sup>2</sup> installed 2-layer roof waterproofing, from cradle-to-grave, with activities needed for a study period of 60 years for the building.

Name	Amount	Unit
<b>PTM BituFlex (top layer) &amp; PTM DuraFlex Kombi (bottom layer)</b>		
Functional unit	1	m <sup>2</sup> installed 2-layer roof waterproofing during 60 years
Conversion factor to 1 kg	0,07	m <sup>2</sup> installed 2-layer roof waterproofing during 60 years/kg
<b>PTM BituFlex Kombi (top layer) &amp; PTM Duraflex (bottom layer)</b>		
Functional unit	1	m <sup>2</sup> installed 2-layer roof waterproofing during 60 years
Conversion factor to 1 kg	0,07	m <sup>2</sup> installed 2-layer roof waterproofing during 60 years /kg

## Declared unit

In addition to the functional unit, the PCR requires that results are also displayed per a declared unit of 1 m<sup>2</sup> of produced waterproofing for cradle-to-gate.


In this EPD, the results per declared unit (1 m<sup>2</sup> top layer + 1 m<sup>2</sup> bottom layer) corresponds to the first column of the results per functional unit.

Name	Amount	Unit
<b>PTM BituFlex (top layer) &amp; PTM DuraFlex Kombi (bottom layer)</b>		
Declared unit	1	m <sup>2</sup> produced waterproofing
Conversion factor to 1 kg	0,12	m <sup>2</sup> produced waterproofing/kg
<b>PTM BituFlex Kombi (top layer) &amp; PTM Duraflex (bottom layer)</b>		
Declared unit	1	m <sup>2</sup>
Conversion factor to 1 kg	0,12	m <sup>2</sup> /kg

## PCR

This EPD is developed according to the core rules for the product category of construction products in EN 15804, and NPCR 022 version 2.0 (PCR – Part B for roof waterproofing).

## Flowdiagram

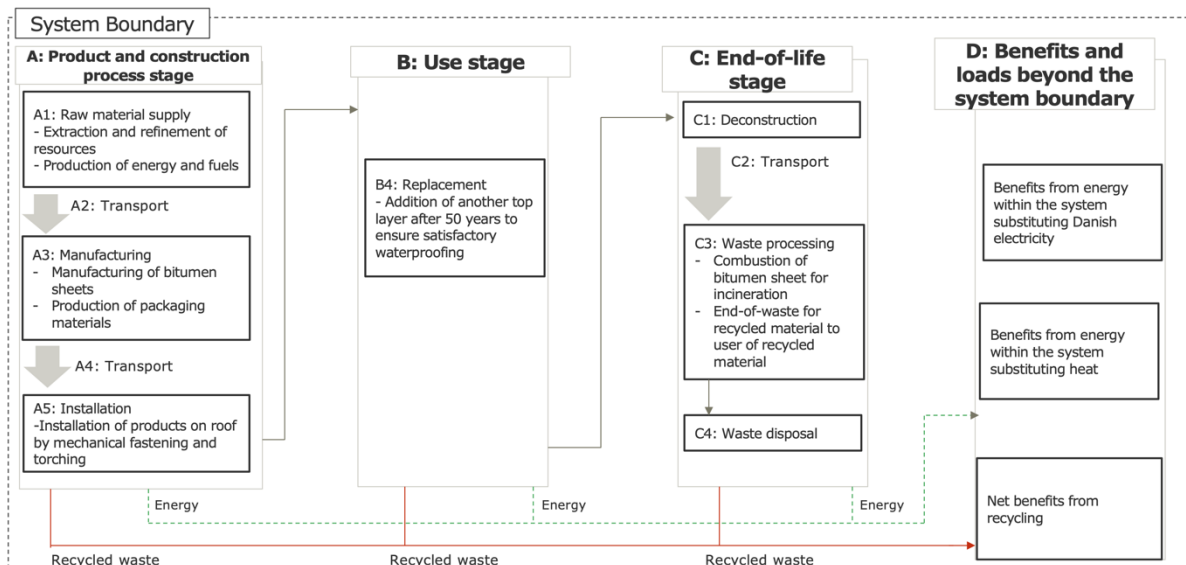

## System boundary

This EPD is based on an LCA, in which 99,9 weight-% has been accounted for. The packaging materials of incoming raw materials have been excluded.

The cut-off criteria, meaning the general rules for the exclusion of inputs and outputs, follows the requirements in EN 15804, 6.3.5, where the total of neglected input flows per module shall be a maximum of 5 % of energy usage and mass and 1 % of energy usage and mass for unit processes.

### Product stage (A1-A3) includes:

#### A1 – Raw material supply

Module A1 comprises impacts from extraction and processing of raw materials including bitumen, SBS-polymer, reinforcements (polyester/glass- and polyester fiber), fillers, etc. The module also includes the production of purchased electricity and water used at the PTM production site.

#### A2 – Transport (to the manufacturing site)

Module A2 comprises impacts from transportation of raw materials to the PTM production site, which includes extraction and production of the fuels as well as the combustion of the fuel during the transport.

#### A3 – Manufacturing

Module A3 includes the manufacturing of the final product, production of packaging materials, combustion of fuels on site, as well as end-of-life treatment of waste generated during manufacturing. Land use is also included, both land occupation and land transformation, as well as inflows and outflows of water that is used in the manufacturing. Impacts from these waste management processes are included in module A3.

### Construction process stage (A4-A5) includes:

#### A4 – Transport

Module A4 includes impacts from transportation of the finished products (top and bottom layer)

to an assumed installation site in Denmark. The module includes extraction of the fuels and the combustion of the fuel during the transport.

#### A5 – Construction installation process

Module A5 represents installation of the product to the building at the installation site. The module includes the production of additional bitumen sheets needed for overlap of the layers for complete waterproofing and wasted product during installation. It also includes production of fastening materials, and production and combustion of propane for torching. Waste from the installation is classified as materials for recycling or waste for incineration with energy recovery. Impacts from these waste management processes are included in module A5 whereas potential benefits beyond the system boundary are reported in module D.

### Use stage (B1-B7) includes:

#### B1 – Use

No impacts from use have been included in accordance with the default values provided in the reference PCR.

#### B2 – Maintenance

No impacts from maintenance have been included in accordance with the default values provided in the reference PCR.

#### B3 – Repair

No impacts from repair have been included in accordance with the default values provided in the reference PCR.

#### B4 – Replacement

Module B4 includes replacement after 50 years to maintain the function of the waterproofing system. The module includes production of a new top sheet and its installation via torching on top of the existing sheets, as well as propane for torching. Production of material wasted during installation is also included. Waste from the replacement is classified as materials for recycling or incinerated with energy recovery. Impacts from these processes are included in module B4 whereas potential benefits beyond the system boundary are reported in module D.

#### B5 – Refurbishment

No impacts from the refurbishment have been included in accordance with the default values provided in the reference PCR. Planned replacement is accounted for in B4 as required by the reference PCR.

#### B6 – Operational energy use

The roofing system does not require energy to operate, there is therefore no operational energy use for either of the product systems.

#### B7 – Operational water use

The roofing system does not require water to operate, there is therefore no operational water use for either of the product systems.

#### **End of Life stage (C1-C4) includes:**

##### C1 – De-construction, demolition

De-construction of the waterproofing sheet was assumed to be done manually, and thus not require any processes with an environmental impact.

##### C2 – Transport (to waste processing)

Module C2 comprises impacts from transportation of the deconstructed products after 60 years to the waste processing. The waste processing consists of two scenarios that are displayed separately.

##### C3 – Waste processing

Module C3 consists of the waste processing steps, that is incineration of the bitumen sheets at end-of-life. Emissions from incineration are reported in module C3 and the benefits from heat and electricity generation are carried forward to module D. The de-constructed bitumen from C1 that is recycled is reported as materials for recycling in C3. Waste for recycling leaves the system boundary and potential benefits are reported in module D.

#### C4 – Disposal

Ashes and other remains after incineration are reported in stage C4, this includes slag landfill and residual landfill. Note that this does not include ashes from the other modules with bitumen waste, i.e. module A5 and B4, since the emissions are reported in their respective modules.

#### **Re-use, recovery and recycling potential (D) includes:**

Module D includes reuse, recovery and/or recycling potential, expressed as net impact and benefits, due to recycling and incineration of materials with energy recovery. In the end of life stage, part of the product is incinerated, and electricity and heat are produced. The energy is recovered and assumed to replace electricity and heat that would have been produced from other sources.

For the sheets that are sent to recycling, the net benefit consists of burdens from recycling processes and the benefit of replacement of alternative material production used in the production of asphalt mixture.

# LCA results

## Results per functional unit – System 1

PTM BituFlex (top layer) & PTM DuraFlex Kombi (bottom layer)

ENVIRONMENTAL IMPACTS PER [m2 installed 2-layer roof waterproofing during 60 years]																				
Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	100% recycling				30% recycling, 70% incineration			
													C2	C3	C4	D	C2	C3	C4	D
GWP-total	[kg CO <sub>2</sub> eq.]	3,64E+00	1,05E-01	1,93E+00	0	0	0	3,46E+00	0	0	0	0	1,67E-01	0	0	-1,79E+00	7,34E-02	2,40E+01	1,00E-02	-9,16E+00
GWP-fossil	[kg CO <sub>2</sub> eq.]	3,62E+00	1,03E-01	1,91E+00	0	0	0	3,44E+00	0	0	0	0	1,64E-01	0	0	-1,79E+00	7,20E-02	2,40E+01	9,98E-03	-9,19E+00
GWP-biogenic	[kg CO <sub>2</sub> eq.]	1,15E-02	1,12E-03	1,70E-02	0	0	0	1,07E-02	0	0	0	0	1,78E-03	0	0	-2,19E-03	7,84E-04	1,25E-03	2,68E-05	3,64E-02
GWP-luluc	[kg CO <sub>2</sub> eq.]	1,16E-02	8,41E-04	1,75E-03	0	0	0	7,68E-03	0	0	0	0	1,34E-03	0	0	-3,34E-04	5,90E-04	2,84E-04	9,27E-07	-7,18E-03
ODP	[kg CFC 11 eq.]	4,14E-08	1,91E-17	1,58E-07	0	0	0	1,49E-07	0	0	0	0	3,04E-17	0	0	1,05E-07	1,34E-17	1,07E-07	2,01E-09	3,29E-08
AP	[mol H <sup>+</sup> eq.]	7,26E-03	1,20E-04	4,09E-03	0	0	0	6,29E-03	0	0	0	0	1,92E-04	0	0	2,41E-03	8,43E-05	8,44E-03	1,00E-04	-7,35E-03
EP-freshwater	[kg P <sub>eq</sub> eq.]	1,87E-04	3,17E-07	5,78E-05	0	0	0	1,16E-04	0	0	0	0	5,05E-07	0	0	-7,68E-05	2,22E-07	1,15E-04	5,66E-07	-3,95E-05
EP-marine	[kg N eq.]	3,46E-03	3,69E-05	1,22E-03	0	0	0	2,75E-03	0	0	0	0	5,89E-05	0	0	-3,96E-03	2,59E-05	2,43E-03	4,29E-05	-4,07E-03
EP-terrestrial	[mol N eq.]	3,82E-02	4,38E-04	1,33E-02	0	0	0	3,00E-02	0	0	0	0	6,98E-04	0	0	-4,44E-02	3,07E-04	2,24E-02	4,70E-04	-4,36E-02
POCP	[kg NMVOC eq.]	7,26E-03	9,95E-05	3,77E-03	0	0	0	6,96E-03	0	0	0	0	1,59E-04	0	0	2,89E-03	6,98E-05	5,69E-03	1,31E-04	-6,68E-03
ADPm <sup>1</sup>	[kg Sb eq.]	1,56E-06	8,40E-09	1,19E-05	0	0	0	1,88E-06	0	0	0	0	1,34E-08	0	0	7,02E-07	5,90E-09	1,17E-05	1,46E-08	-1,33E-06
ADPf <sup>1</sup>	[MJ]	2,71E+02	1,39E+00	4,95E+01	0	0	0	1,89E+02	0	0	0	0	2,21E+00	0	0	-6,28E+02	9,73E-01	5,76E+00	1,34E-01	-3,20E+02
WDP <sup>1</sup>	[m <sup>3</sup> ]	6,80E-01	1,01E-03	2,62E-01	0	0	0	4,01E-01	0	0	0	0	1,62E-03	0	0	-1,94E-01	7,11E-04	5,67E-01	3,10E-04	-2,94E-01
Caption	GWP-total = Global Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water use																			
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.																			

ADDITIONAL ENVIRONMENTAL IMPACTS PER [m2 installed 2-layer roof waterproofing during 60 years]																				
Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	100% recycling				30% recycling, 70% incineration			
													C2	C3	C4	D	C2	C3	C4	D
PM	[Disease incidence]	1,20E-07	7,96E-10	4,94E-08	0	0	0	9,29E-08	0	0	0	0	1,27E-09	0	0	-4,64E-08	5,59E-10	5,05E-08	2,60E-09	-8,01E-08
IRP <sup>2</sup>	[kBq U235 eq.]	2,25E-01	3,79E-04	7,60E-02	0	0	0	1,85E-01	0	0	0	0	6,04E-04	0	0	2,65E-02	2,66E-04	2,60E-02	5,85E-04	-2,22E-01
ETP-fw <sup>1</sup>	[CTUe]	4,77E+01	1,04E+00	1,30E+01	0	0	0	3,75E+01	0	0	0	0	1,65E+00	0	0	-3,11E+01	7,28E-01	1,01E+01	1,03E-01	-2,22E+01
HTP-c <sup>1</sup>	[CTUh]	3,25E-09	2,14E-11	1,06E-08	0	0	0	2,05E-09	0	0	0	0	3,42E-11	0	0	2,34E-10	1,50E-11	6,81E-10	2,97E-12	-1,58E-09
HTP-nc <sup>1</sup>	[CTUh]	6,62E-08	1,09E-09	1,93E-08	0	0	0	7,05E-08	0	0	0	0	1,74E-09	0	0	-4,13E-09	7,68E-10	2,45E-08	1,19E-10	-2,85E-08
SQP <sup>1</sup>	-	3,79E+01	4,87E-01	6,34E+00	0	0	0	2,33E+01	0	0	0	0	7,76E-01	0	0	3,25E-01	3,42E-01	2,50E+00	6,07E-01	-4,34E+01
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)																			
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator. <sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.																			

### RESOURCE USE PER [m<sup>2</sup> installed 2-layer roof waterproofing during 60 years]

Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	100% recycling				30% recycling, 70% incineration			
													C2	C3	C4	D	C2	C3	C4	D
PERE	[MJ]	1,71E+01	8,02E-02	2,43E+00	0	0	0	1,03E+01	0	0	0	0	1,28E-01	0	0	-1,67E+00	5,63E-02	2,38E-01	1,02E-03	-6,09E+01
PERM	[MJ]	7,20E-01	0	8,64E-02	0	0	0	4,03E-01	0	0	0	0	0	0	0	0	0	0	0	0
PERT	[MJ]	1,78E+01	8,02E-02	2,52E+00	0	0	0	1,07E+01	0	0	0	0	1,28E-01	0	0	-1,67E+00	5,63E-02	2,38E-01	1,02E-03	-6,09E+01
PENRE	[MJ]	8,20E+01	1,39E+00	2,68E+01	0	0	0	6,79E+01	0	0	0	0	2,22E+00	0	0	-1,16E+02	9,77E-01	5,76E+00	1,34E-01	-1,57E+02
PENRM	[MJ]	2,02E+02	0	2,42E+01	0	0	0	1,29E+02	0	0	0	0	0	0	0	-5,50E+02	0	0	0	-1,75E+02
PENRT	[MJ]	2,84E+02	1,39E+00	5,10E+01	0	0	0	1,97E+02	0	0	0	0	2,22E+00	0	0	-6,66E+02	9,77E-01	5,76E+00	1,34E-01	-3,32E+02
SM	[kg]	2,04E-01	0	2,47E-02	0	0	0	9,31E-02	0	0	0	0	0	0	0	0	0	0	0	0
RSF	[MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
NRSF	[MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
FW	[m <sup>3</sup> ]	1,69E-02	9,34E-05	6,54E-03	0	0	0	9,99E-03	0	0	0	0	1,49E-04	0	0	-4,91E-03	6,56E-05	1,32E-02	7,23E-06	-2,87E-02
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water																			

### WASTE CATEGORIES AND OUTPUT FLOWS PER [m<sup>2</sup> installed 2-layer roof waterproofing during 60 years]

Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	100% recycling				30% recycling, 70% incineration			
													C2	C3	C4	D	C2	C3	C4	D
HWD	[kg]	1,42E-07	6,44E-08	2,89E-08	0	0	0	1,51E-07	0	0	0	0	1,03E-07	0	0	8,10E-10	4,52E-08	0	0	-7,96E-08
NHWD	[kg]	4,90E-02	2,21E-04	7,99E-03	0	0	0	2,32E-02	0	0	0	0	3,52E-04	0	0	7,37E-01	1,55E-04	0	0	8,93E-02
RWD	[kg]	1,12E-03	2,57E-06	9,93E-05	0	0	0	7,22E-04	0	0	0	0	4,09E-06	0	0	-3,73E-05	1,80E-06	0	0	-2,19E-03
CRU	[kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
MFR	[kg]	0	0	1,14E-01	0	0	0	1,56E-01	0	0	0	0	0	1,45E+01	0	0	0	4,35E+00	0	0
MER	[kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
EEE	[MJ]	0	0	4,49E-01	0	0	0	2,69E-01	0	0	0	0	0	0	0	0	0	3,95E+01	0	0
EET	[MJ]	0	0	8,68E-01	0	0	0	5,19E-01	0	0	0	0	0	0	0	0	0	7,64E+01	0	0
Caption	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy																			

### BIOGENIC CARBON CONTENT PER [m<sup>2</sup> installed 2-layer roof waterproofing during 60 years]

Parameter	Unit	At the factory gate
Biogenic carbon content in product	[kg C]	0
Biogenic carbon content in accompanying packaging	[kg C]	2,25E-02
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>	



## Results per functional unit – System 2

PTM BituFlex Kombi (top layer) & PTM DuraFlex (bottom layer)

ENVIRONMENTAL IMPACTS PER [m2 installed 2-layer roof waterproofing during 60 years]																				
Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	100% recycling				30% recycling, 70% incineration			
													C2	C3	C4	D	C2	C3	C4	D
GWP-total	[kg CO <sub>2</sub> eq.]	3,97E+00	1,05E-01	1,97E+00	0	0	0	3,57E+00	0	0	0	0	1,68E-01	0	0	-1,80E+00	7,38E-02	2,42E+01	1,01E-02	-9,21E+00
GWP-fossil	[kg CO <sub>2</sub> eq.]	3,95E+00	1,03E-01	1,95E+00	0	0	0	3,55E+00	0	0	0	0	1,65E-01	0	0	-1,80E+00	7,24E-02	2,41E+01	1,00E-02	-9,24E+00
GWP-biogenic	[kg CO <sub>2</sub> eq.]	1,60E-02	1,12E-03	1,77E-02	0	0	0	1,90E-02	0	0	0	0	1,79E-03	0	0	-2,21E-03	7,88E-04	1,26E-03	2,69E-05	3,66E-02
GWP-luluc	[kg CO <sub>2</sub> eq.]	1,22E-02	8,41E-04	1,80E-03	0	0	0	7,95E-03	0	0	0	0	1,35E-03	0	0	-3,36E-04	5,94E-04	2,86E-04	9,32E-07	-7,22E-03
ODP	[kg CFC 11 eq.]	2,25E-08	1,91E-17	1,54E-07	0	0	0	1,50E-07	0	0	0	0	3,06E-17	0	0	1,06E-07	1,35E-17	1,08E-07	2,02E-09	3,31E-08
AP	[mol H <sup>+</sup> eq.]	7,21E-03	1,20E-04	3,96E-03	0	0	0	6,67E-03	0	0	0	0	1,93E-04	0	0	2,42E-03	8,47E-05	8,48E-03	1,01E-04	-7,39E-03
EP-freshwater	[kg PO <sub>4</sub> eq.]	1,52E-04	3,17E-07	5,33E-05	0	0	0	1,22E-04	0	0	0	0	5,08E-07	0	0	-7,73E-05	2,23E-07	1,16E-04	5,69E-07	-3,98E-05
EP-marine	[kg N eq.]	3,57E-03	3,69E-05	1,21E-03	0	0	0	2,87E-03	0	0	0	0	5,92E-05	0	0	-3,98E-03	2,60E-05	2,44E-03	4,31E-05	-4,10E-03
EP-terrestrial	[mol N eq.]	3,88E-02	4,38E-04	1,32E-02	0	0	0	3,12E-02	0	0	0	0	7,02E-04	0	0	-4,47E-02	3,09E-04	2,25E-02	4,72E-04	-4,39E-02
POCP	[kg NMVOC eq.]	7,71E-03	9,95E-05	3,78E-03	0	0	0	7,07E-03	0	0	0	0	1,60E-04	0	0	2,91E-03	7,02E-05	5,72E-03	1,32E-04	-6,72E-03
ADPm <sup>1</sup>	[kg Sb eq.]	1,05E-06	8,40E-09	1,18E-05	0	0	0	1,92E-06	0	0	0	0	1,35E-08	0	0	7,06E-07	5,93E-09	1,18E-05	1,47E-08	-1,34E-06
ADPf <sup>1</sup>	[MJ]	2,84E+02	1,39E+00	5,06E+01	0	0	0	1,98E+02	0	0	0	0	2,22E+00	0	0	-6,31E+02	9,78E-01	5,79E+00	1,35E-01	-3,22E+02
WDP <sup>1</sup>	[m <sup>3</sup> ]	5,76E-01	1,01E-03	2,50E-01	0	0	0	4,08E-01	0	0	0	0	1,63E-03	0	0	-1,96E-01	7,15E-04	5,70E-01	3,12E-04	-2,95E-01
Caption	GWP-total = Global Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water use																			
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.																			

ADDITIONAL ENVIRONMENTAL IMPACTS PER [m2 installed 2-layer roof waterproofing during 60 years]																				
Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	100% recycling				30% recycling, 70% incineration			
													C2	C3	C4	D	C2	C3	C4	D
PM	[Disease incidence]	1,13E-07	7,96E-10	4,72E-08	0	0	0	9,49E-08	0	0	0	0	1,28E-09	0	0	-4,66E-08	5,62E-10	5,08E-08	2,62E-09	-8,06E-08
IRP <sup>2</sup>	[kBq U235 eq.]	2,45E-01	3,79E-04	7,79E-02	0	0	0	1,93E-01	0	0	0	0	6,07E-04	0	0	2,67E-02	2,67E-04	2,62E-02	5,89E-04	-2,24E-01
ETP-fw <sup>1</sup>	[CTUe]	4,98E+01	1,04E+00	1,32E+01	0	0	0	3,83E+01	0	0	0	0	1,66E+00	0	0	-3,13E+01	7,32E-01	1,02E+01	1,04E-01	-2,24E+01
HTP-c <sup>1</sup>	[CTUh]	2,83E-09	2,14E-11	1,05E-08	0	0	0	2,06E-09	0	0	0	0	3,44E-11	0	0	2,36E-10	1,51E-11	6,84E-10	2,98E-12	-1,58E-09
HTP-nc <sup>1</sup>	[CTUh]	1,13E-07	1,09E-09	2,47E-08	0	0	0	7,50E-08	0	0	0	0	1,75E-09	0	0	-4,15E-09	7,72E-10	2,46E-08	1,20E-10	-2,86E-08
SQP <sup>1</sup>	-	3,60E+01	4,87E-01	6,08E+00	0	0	0	2,24E+01	0	0	0	0	7,81E-01	0	0	3,27E-01	3,43E-01	2,52E+00	6,11E-01	-4,36E+01
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)																			
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.																			
	<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.																			

### RESOURCE USE PER [m2 installed 2-layer roof waterproofing during 60 years]

Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	100% recycling				30% recycling, 70% incineration			
													C2	C3	C4	D	C2	C3	C4	D
													PERE	[MJ]	1,83E+01	8,02E-02	2,52E+00	0	0	0
PERM	[MJ]	5,99E-01	0	7,18E-02	0	0	0	3,35E-01	0	0	0	0	0	0	0	0	0	0	0	0
PERT	[MJ]	1,89E+01	8,02E-02	2,59E+00	0	0	0	1,11E+01	0	0	0	0	1,29E-01	0	0	-1,68E+00	5,66E-02	2,39E-01	1,03E-03	-6,12E+01
PENRE	[MJ]	9,26E+01	1,39E+00	2,76E+01	0	0	0	7,19E+01	0	0	0	0	2,23E+00	0	0	-1,18E+02	9,82E-01	5,79E+00	1,35E-01	-1,56E+02
PENRM	[MJ]	2,05E+02	0	2,46E+01	0	0	0	1,34E+02	0	0	0	0	0	0	0	-5,53E+02	0	0	0	-1,78E+02
PENRT	[MJ]	2,97E+02	1,39E+00	5,22E+01	0	0	0	2,06E+02	0	0	0	0	2,23E+00	0	0	-6,70E+02	9,82E-01	5,79E+00	1,35E-01	-3,34E+02
SM	[kg]	1,73E-01	0	2,07E-02	0	0	0	1,00E-01	0	0	0	0	0	0	0	0	0	0	0	0
RSF	[MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
NRSF	[MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
FW	[m³]	1,51E-02	9,34E-05	6,34E-03	0	0	0	1,04E-02	0	0	0	0	1,50E-04	0	0	-4,94E-03	6,59E-05	1,33E-02	7,27E-06	-2,88E-02
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water																			

### WASTE CATEGORIES AND OUTPUT FLOWS PER [m2 installed 2-layer roof waterproofing during 60 years]

Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	100% recycling				30% recycling, 70% incineration			
													C2	C3	C4	D	C2	C3	C4	D
													HWD	[kg]	1,56E-07	6,44E-08	3,04E-08	0	0	0
NHWD	[kg]	5,65E-02	2,21E-04	8,83E-03	0	0	0	2,87E-02	0	0	0	0	3,54E-04	0	0	7,42E-01	1,56E-04	0	0	9,00E-02
RWD	[kg]	1,28E-03	2,57E-06	9,74E-05	0	0	0	7,69E-04	0	0	0	0	4,12E-06	0	0	-3,76E-05	1,81E-06	0	0	-2,20E-03
CRU	[kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
MFR	[kg]	0	0	1,09E-01	0	0	0	1,66E-01	0	0	0	0	0	1,46E+01	0	0	0	4,38E+00	0	0
MER	[kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
EEE	[MJ]	0	0	4,49E-01	0	0	0	2,73E-01	0	0	0	0	0	0	0	0	0	3,97E+01	0	0
EET	[MJ]	0	0	8,68E-01	0	0	0	5,28E-01	0	0	0	0	0	0	0	0	0	7,68E+01	0	0
Caption	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy																			

### BIOGENIC CARBON CONTENT PER [m2 installed 2-layer roof waterproofing during 60 years]

Parameter	Unit	At the factory gate
Biogenic carbon content in product	[kg C]	0
Biogenic carbon content in accompanying packaging	[kg C]	1,90E-02
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>	

# Additional information

## Technical information on scenarios

### Transport to the building site (A4)

Scenario information	Value	Unit
Fuel type	Diesel	-
Vehicle type	Euro 6, 28-32 t gross	-
Transport distance	164	km
Capacity utilisation (including empty runs)	61	%
Capacity utilisation volume factor	1	-

### Installation of the product in the building (A5)

Scenario information	System 1	System 2	Unit
Ancillary materials	0,017 (plastic bushings)	0,017 (plastic bushings)	kg
	0,056 (steel screws)	0,056 (steel screws)	
Water use	0	0	m <sup>3</sup>
Other resource use	-	-	kg
Energy type and consumption	2,49 (propane)	2,49 (propane)	kWh
Waste materials	0,046 (wooden pallet, for recycling)	0,039 (wooden pallet, for recycling)	kg
	0,005 (wooden pallet, for incineration)	0,0043 (wooden pallet, for incineration)	
	0,03 (plastics, for incineration)	0,039 (plastics, for incineration)	
	0,12 (bitumen, for incineration)	0,12 (bitumen, for incineration)	
	0,050 (bitumen, for recycling)	0,050 (bitumen, for recycling)	
Output materials	9,08 bitumen sheet	9,08 bitumen sheet	kg
Direct emissions to air, soil or water	Combustion of propane	Combustion of propane	kg

### Reference service life

RSL information	Value
Reference service Life	60 years for building; 50 years for product system
Declared product properties	Roof waterproofing
Assumed quality of work	Instructions are available via <a href="https://www.phonixtagmaterialer.dk/">https://www.phonixtagmaterialer.dk/</a>
Maintenance	-

### Use (B1-B7)

Scenario information	Value	Unit
<b>B4 – Replacement</b>		
Replacement cycle	0,02	/year
Energy input during replacement	2,2 (propane)	kWh
Exchange of worn parts during products life cycle	0	kg

### End of life (C1-C4)

Scenario information	30% recycling; 70% incineration with energy recovery		100% recycling		Unit
	System 1	System 2	System 1	System 2	
Collected separately	14,5	14,6	14,5	14,6	kg
Collected with mixed waste	0	0	0	0	kg
For reuse	0	0	0	0	kg
For recycling	4,35	4,38	14,5	14,6	kg
For energy recovery	10,15	10,22	0	0	kg
For final disposal	0	0	0	0	kg
Assumptions for scenario development	30 km to incineration 150 km to recycling	30 km to incineration 150 km to recycling	150 km to recycling	150 km to recycling	-

### Re-use, recovery and recycling potential (D)

Scenario information/Materiel	30% recycling; 70% incineration with energy recovery		100% recycling		Unit
	System 1	System 2	System 1	System 2	
Material for recycling	4,62	4,65	14,8	14,9	kg
Material for energy recovery	10,15	10,22	0	0	kg


### Indoor air

*The EPD does not give information on release of dangerous substances to indoor air because the horizontal standards on measurement of release of regulated dangerous substances from construction products using harmonised test methods according to the provisions of the respective technical committees for European product standards are not available.*

### Soil and water

*The EPD does not give information on release of dangerous substances to soil and water because the horizontal standards on measurement of release of regulated dangerous substances from construction products using harmonised test methods according to the provisions of the respective technical committees for European product standards are not available.*

# References

<p><b>Publisher</b></p>	 <a href="http://www.epddanmark.dk">www.epddanmark.dk</a>
<p><b>Programme operator</b></p>	<p>Danish Technological Institute Buildings &amp; Environment Gregersensvej DK-2630 Taastrup <a href="http://www.teknologisk.dk">www.teknologisk.dk</a></p>
<p><b>LCA-practitioner</b></p>	<p>Sara Tollin, David Lindén, Niclas Silfverstrand and Kristian Jelse Ramboll Sweden AB Vädursgatan 6 SE-412 50 Göteborg Email: <a href="mailto:sara.tollin@ramboll.se">sara.tollin@ramboll.se</a></p>
<p><b>LCA software / background data</b></p>	<p>GaBi ts 9.2.1.68 incl. databases 2019 Edition Ecoinvent 3.6, LCI profile from Eurobitume (2019)</p>
<p><b>3<sup>rd</sup> party verifier</b></p>	<p>Guangli Du, Aalborg University, Denmark</p>
<p><b>General programme instructions</b> Version 2.0, <a href="http://www.epddanmark.dk">www.epddanmark.dk</a></p>	
<p><b>EN 15804</b> DS/EN 15804 + A2:2019 - "Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products"</p>	
<p><b>Productspezifisk cPCR</b> NPCR 022 version 2.0 (PCR – Part B for roof waterproofing). Dated 2018-06-06.</p>	
<p><b>EN 15942</b> DS/EN 15942:2011 – "Sustainability of construction works – Environmental product declarations – Communication format business-to-business"</p>	
<p><b>ISO 14025</b> DS/EN ISO 14025:2010 – "Environmental labels and declarations – Type III environmental declarations – Principles and procedures"</p>	
<p><b>ISO 14040</b> DS/EN ISO 14040:2008 – "Environmental management – Life cycle assessment – Principles and framework"</p>	
<p><b>ISO 14044</b> DS/EN ISO 14044:2008 – "Environmental management – Life cycle assessment – Requirements and guidelines"</p>	