

Owner: Egernsund Wienerberger A/S
No.: MD-26038-EN
Issued: 16-04-2026
Valid to: 16-04-2031

3rd PARTY VERIFIED

EPD

VERIFIED ENVIRONMENTAL PRODUCT DECLARATION | ISO 14025 & EN 15804



Owner of declaration
Egernsund Wienerberger A/S
H. C. Ørsteds Vej 50C
1879 Frederiksberg C
CVR-nr. DK 10502306
www.egernsund.com



Issued:
16-04-2026

Valid to:
16-04-2031

Programme
EPD Danmark
www.epddanmark.dk



- | | |
|---|--|
| <input type="checkbox"/> Industry EPD | <input type="checkbox"/> Product specific |
| <input checked="" type="checkbox"/> Product EPD | <input type="checkbox"/> Average |
| | <input checked="" type="checkbox"/> Worst Case |

Declared product(s)
Red bricks from Helligsø Teglværk

Number of declared datasets/product variations: 1

Production site
Helligsø Teglværk
Helligsøvej 15
7760 Hurup Thy
Denmark

- Use of Guarantees of Origin**
- No certificates used
 - Electricity covered by GoO
 - Biomethane covered by GoO

Declared/ functional unit
1 tonne of bricks

Year of production site data (A3)
2024

EPD version
1

Basis of calculation

This EPD is developed and verified in accordance with the European standard EN 15804+A2.

Comparability

EPDs of construction products may not be comparable if they do not comply with the requirements in EN 15804. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database.

Validity

This EPD has been verified in accordance with ISO 14025 and is valid for 5 years from the date of issue.

Use

The intended use of an EPD is to communicate scientifically based environmental information for construction products, for the purpose of assessing the environmental performance of buildings.

EPD type

- Cradle-to-gate with modules C1-C4 and D
- Cradle-to-gate with options, modules C1-C4 and D
- Cradle-to-grave and module D
- Cradle-to-gate
- Cradle-to-gate with options

CEN standard EN 15804 serves as the core PCR
Independent verification of the declaration and data, according to EN ISO 14025
<input type="checkbox"/> internal <input checked="" type="checkbox"/> external
Third party verifier:  <hr/> <i>Nana Lin Rasmussen, Lin Consulting ApS</i>



 Martha Katrine Sørensen
 EPD Danmark

Life cycle stages and modules (MND = module not declared)

Product			Construction process		Use								End of life				Beyond the system boundary
Raw material supply	Transport	Manufacturing	Transport	Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Re-use, recovery and recycling potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	

Product information

Product description

Bricks are durable, modular construction units made primarily from clay and sand. Variations in clay type, pigments, and forming processes result in varied aesthetics. This EPD specifically covers Red bricks such as *EW2207 Thy Rød* produced in different formats including LESS and slips.

The main product components are shown in the table below. Red bricks consist of 0% secondary material.

Material	Weight-% of declared product
Clay	100
Pigments	<1

Product packaging:

The composition of the sales- and transport packaging of the product is shown in the table below. 83% of the pallets are reused.

Material	Weight of packaging material (kg)	Weight-% of packaging
Foil	0,45	1,4
Straps	0,07	0,2
Pallets	31,93	98,4
Total	32,44	100

Representativity

This declaration, including data collection and the modeled foreground system including results, represents the production of bricks at Helligsø Teglværk. Production data is based on the full year 2024.

A weighted average value has been calculated based on the production in 2024. The maximum possible addition of pigments (worst case product) has been modelled in parallel to the average result.

Red bricks are declared as worst case.

The difference in GWP-total within each life cycle stage between the declared average result and the worst case product covered by this EPD is not within the allowed span of +/-10%. The A1-A3 GWP-total of the worst case product is +10,4% of the average product.

Background data are sourced from ecoinvent 3.11, and all datasets used are less than two years old at the time of the study. A dataset quality assessment following *EN 15804:2012+A2:2019, Annex E (Table E.1)* confirms that the datasets meet the required quality criteria.

Hazardous substances

The declared products do not contain substances listed on the "Candidate List of Substances of Very High Concern for authorisation"

(<http://echa.europa.eu/candidate-list-table>)

Product(s) use

Bricks are commonly used with mortar for construction of both structural and non-structural applications, including load-bearing walls, partition walls, and facades.

Essential characteristics

Bricks are covered by harmonized technical specification EN 771-1:2011+A1:2015. Declaration of performance (DoP) according to EU regulation 305/2011 is available for all declared product variations.

Further technical information can be obtained by contacting egersund wienerberger or on the website:

www.egersund.com

Reference Service Life (RSL)

150 years reference service life as outlined in the TBE PCR (2020):

"For clay construction products, the RSL is 150 years. Studies have shown that clay construction products stand out with their high durability and prevail with no maintenance and a life span of 150 years and more."

Picture of product(s)



The brick products covered by this EPD can vary significantly in expression. The images in this document are examples. Information on which products are covered by this EPD can be obtained by contacting egersund wienerberger or on the website:

www.egersund.com

LCA Background

Declared unit

The LCI and LCIA results in this EPD relates to 1 tonne of Red bricks from Helligsø Teglværk.

Name	Value	Unit
Declared unit	1	Tonne

Material properties

Ten holes decrease the density of the LESS bricks compared to solid bricks. The lower density results in lower environmental impacts when converting into m².

Name	Mass factor (kg/DU)	Density (kg/m ³)
LESS bricks	1000	1500
Solid bricks	1000	1750

The density for each specific product is stated in the DoP and on the website.

Conversion factors

To convert the declared unit into m², the format and density of the bricks as well the width of the mortar joints must be considered.

When building with the common DNF (Dansk Normal Format) bricks and 12mm mortar joints 63 bricks are used per m² excluding cutoffs and waste.

DNF bricks measure 228 x 108 x 54 mm.

Name	Conversion factor
Conversion factor to 1 kg.	0,001
63 DNF LESS Bricks (1 m ²)	0,126
63 DNF Solid Bricks (1 m ²)	0,147

For other brick formats the conversion factor can be calculated in the following way:

Bricks per m² x Brick volume (m³) x Density (kg/m³) / 1000

PCR

This EPD is developed according to the core rules for the product category of construction products in EN 15804:2012 +A2:2019, and the Internal Guidance Document on TBE PCR for Clay Construction Products (2020).

Energy modelling principles

Foreground system:

The product is produced using electricity covered 100% by Danish Wind GoOs. Gas use is covered 100% by Biomethane GoOs.

Information about the energy mix in the foreground system:

Energy mix	EF	Unit
Electricity Danish Wind GoO	2,54E-02	kg CO ₂ e/kWh
Gas Biomethane GoO	9,69E-03	kg CO ₂ e/MJ

Background system:


The database, ecoinvent 3.11 is utilized for the background system. As a result, both upstream- and downstream activities are based on average supply mixes for the specific country or region depending on the given dataset.

Geographical area

The products are produced in Denmark primarily targeted the Danish market. The products are also exported to other countries, such as Norway and Sweden. Therefore GWP-GHG is included under additional information.

The A4-D scenarios reflect use and end-of-life processes within the Danish context but are also representative for Norway, Sweden and other countries with substantially decarbonised energy systems and low landfilling disposal rates of approximately 1%.

Flowdiagram

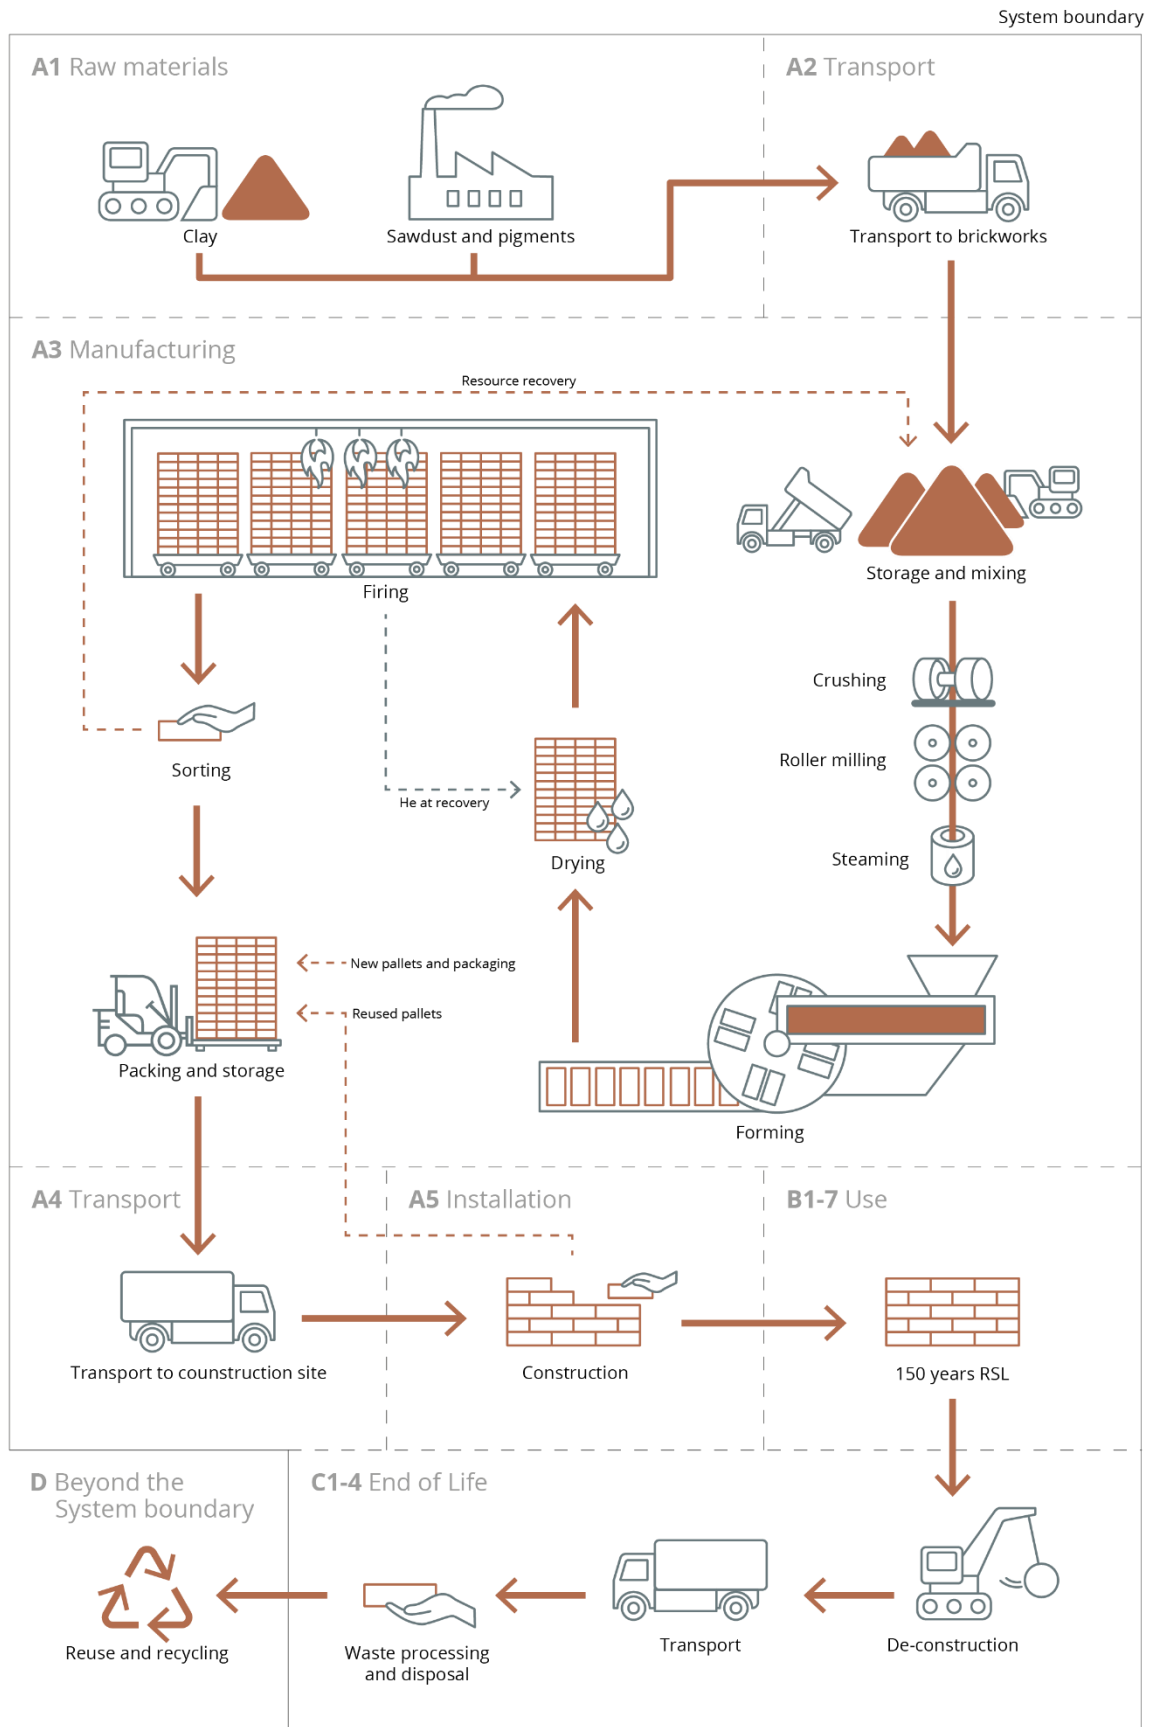

System boundary

This EPD is based on a *cradle-to-grave and module D LCA*, in which >99 weight-% has been accounted for. The excluded processes in this study are the packaging from materials in A1, auxiliary materials, capital goods for the clay pits and the factory.

The LCA was conducted using the Ecoinvent 3.11 database with the system model 'Allocation, cut-off by classification', in accordance with the EN 15804+A2 standard. This approach excludes recycling benefits of secondary materials and energy beyond the system boundary and assigns all upstream burdens to the producer of the primary material.

Characterisation factors from the Environmental Footprint 3.1 (EF 3.1) method were used, as recommended by the EN 15804+A2 standard for midpoint impact assessment.

The general rules for the exclusion of inputs and outputs follows the requirements in EN 15804, 6.3.5, where the total of neglected input flows per module shall be a maximum of 5 % of energy usage and mass and 1 % of energy usage and mass for unit processes.

Product stage (A1-A3) includes:

The product stage comprises the acquisition of all raw materials, products and energy, transport to the production site, packaging and waste processing up to the "end-of-waste" state or final disposal. The LCA results are declared in aggregated form for the product stage, which means, that the sub-modules A1, A2 and A3 are declared as one module A1-A3. The onsite allocation is based on mass.

The production process starts with extracting and transporting clay. Clay is sourced from quarries and combined with various pigments to achieve the desired characteristics. The blended clay mixture is then shaped into bricks and thoroughly dried to eliminate excess moisture. After drying, the product is fired at high temperatures in kilns, which strengthens the dried bricks and enhances their resistance to weather and external stress. During the firing stage, the calcium carbonate (CaCO₃) in the clay decomposes into calcium oxide (CaO) and

carbon dioxide (CO₂). Once the product passes quality control, it is packaged and stored ready for distribution.

Construction process stage (A4-A5) includes:

The environmental impacts in Module A4 are based on 50 km of transportation in accordance with the TBE PCR. Egersund Wienerberger A/S exclusively uses transport providers operating EURO 6 trucks. The scenario includes 1 ton of product along with all associated packaging.

The installation of the bricks is carried out primarily by hand, meaning no energy is required during the installation process. As specified in the TBE PCR (2020) for clay construction products, the environmental impacts of the construction phase are building-specific rather than product-specific, varying according to the design and application of the bricks. Therefore, Module A5 only accounts for the waste treatment of the product packaging and does not include product waste from the installation of the bricks into the building.

The packaging is being treated according to an assessment by VANA. For both the foil and straps it is assumed that 50,2% is being incinerated, 22,9% is being recycled and 26,9% is being landfilled. 50 km transport of 83% of the pallets back to the factory has been included. The remaining 17% are incinerated.

Use stage (B1-B7) includes:

According to the *Internal Guidance Document on TBE PCR for Clay Construction Products (2020)*, Section 5.3, page 14, clay products do not generate environmental impacts during the use phase (B1-B7). As a result, the environmental impact for these modules is reported as 0.

End of Life (C1-C4) includes:

As outlined in the TBE PCR for Clay Construction Products (2020) 100% of clay products are transported 39 km to waste processing. 99% of the products is then recycled and 1% is transported a further 23 km for disposal.

For recycling, the material is run through a mill that crushes the bricks into gravel. The scenario for the crushing is based on a 2013 report by Miljøstyrelsen (Miljøprojekt nr. 1512, 2013).

1% (10 kg) of the product is sent to landfill.

Re-use, recovery and recycling potential (D) includes:

Module D accounts for the reuse, recovery, and/or recycling potential of the bricks presented as net impacts and benefits. This mainly relates to the substitution of gravel through the recycling of crushed bricks and the energy generated from the incineration of packaging materials. The recovered energy substitutes average Danish district heating mix.

LCA results

ENVIRONMENTAL IMPACTS PER TONNE										
Parameter	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
GWP-total	[kg CO ₂ eq.]	2,04E+01	5,26E+00	4,03E+01	0,00E+00	0,00E+00	3,99E+00	5,03E-01	5,82E-02	-4,77E+00
GWP-fossil	[kg CO ₂ eq.]	5,27E+01	5,25E+00	1,02E+00	0,00E+00	0,00E+00	3,99E+00	5,03E-01	5,82E-02	-4,75E+00
GWP-biogenic	[kg CO ₂ eq.]	-3,24E+01	1,13E-03	3,93E+01	0,00E+00	0,00E+00	8,59E-04	5,06E-05	2,08E-05	-1,28E-02
GWP-luluc	[kg CO ₂ eq.]	4,67E-02	1,96E-03	9,80E-05	0,00E+00	0,00E+00	1,49E-03	5,14E-05	2,46E-05	-6,59E-03
ODP	[kg CFC 11 eq.]	1,92E-06	1,19E-07	4,37E-09	0,00E+00	0,00E+00	9,06E-08	7,47E-09	7,61E-10	-8,26E-08
AP	[mol H ⁺ eq.]	6,85E-01	1,28E-02	1,37E-03	0,00E+00	0,00E+00	9,70E-03	4,49E-03	4,77E-04	-3,68E-02
EP-freshwater	[kg P eq.]	6,62E-04	4,13E-05	2,88E-06	0,00E+00	0,00E+00	3,14E-05	1,76E-06	7,26E-07	-1,78E-04
EP-marine	[kg N eq.]	1,85E-01	3,29E-03	5,68E-04	0,00E+00	0,00E+00	2,50E-03	2,09E-03	2,04E-04	-1,03E-02
EP-terrestrial	[mol N eq.]	2,07E+00	3,64E-02	6,08E-03	0,00E+00	0,00E+00	2,76E-02	2,29E-02	2,24E-03	-1,39E-01
POCP	[kg NMVOC eq.]	5,72E-01	2,14E-02	1,88E-03	0,00E+00	0,00E+00	1,62E-02	6,85E-03	6,78E-04	-3,35E-02
ADPm ¹	[kg Sb eq.]	3,49E-04	1,53E-05	6,79E-07	0,00E+00	0,00E+00	1,16E-05	1,79E-07	2,67E-08	-6,25E-05
ADPf ¹	[MJ]	5,52E+02	7,91E+01	3,11E+00	0,00E+00	0,00E+00	6,01E+01	6,50E+00	7,46E-01	-7,18E+01
WDP ¹	[m ³ world eq. deprived]	1,62E+01	4,22E-01	6,90E-02	0,00E+00	0,00E+00	3,21E-01	1,84E-02	3,13E-03	-1,58E+00
Caption	GWP-total = Globale Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water depletion potential									
	The numbers are declared in scientific notation, fx 1,95E+02. This number can also be written as: 1,95*10 ² or 195, while 1,12E-11 is the same as 1,12*10 ⁻¹¹ or 0,0000000000112.									
Disclaimer	¹ The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.									

ADDITIONAL ENVIRONMENTAL IMPACTS PER TONNE										
Parameter	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
PM	[Disease incidence]	7,18E-06	5,20E-07	2,55E-08	0,00E+00	0,00E+00	3,95E-07	1,28E-07	1,26E-08	-7,99E-07
IRP ²	[kBq U235 eq.]	2,30E+00	3,28E-02	1,44E-03	0,00E+00	0,00E+00	2,50E-02	1,09E-03	5,95E-04	-5,47E-01
ETP-fw ¹	[CTUe]	1,11E+03	9,34E+00	1,18E+00	0,00E+00	0,00E+00	7,10E+00	3,55E-01	5,79E-02	-1,95E+01
HTP-c ¹	[CTUh]	3,19E-08	8,63E-10	2,31E-10	0,00E+00	0,00E+00	6,56E-10	5,07E-11	6,31E-12	-2,41E-09
HTP-nc ¹	[CTUh]	3,21E-06	5,11E-08	1,29E-08	0,00E+00	0,00E+00	3,88E-08	8,04E-10	1,40E-10	-7,21E-08
SQP ¹	-	1,01E+03	8,01E+01	2,60E+00	0,00E+00	0,00E+00	6,09E+01	4,34E-01	1,80E+00	-1,70E+02
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)									
	The numbers are declared in scientific notation, fx 1,95E+02. This number can also be written as: 1,95*10 ² or 195, while 1,12E-11 is the same as 1,12*10 ⁻¹¹ or 0,0000000000112.									
Disclaimers	¹ The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.									
	² This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.									

RESOURCE USE PER TONNE										
Parameter	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
PERE	[MJ]	5,04E+02	1,23E+00	6,81E-02	0,00E+00	0,00E+00	9,34E-01	4,12E-02	2,13E-02	-4,53E+01
PERM	[MJ]	4,47E+02	0,00E+00	-4,47E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	[MJ]	9,51E+02	1,23E+00	-4,47E+02	0,00E+00	0,00E+00	9,34E-01	4,12E-02	2,13E-02	-4,53E+01
PENRE	[MJ]	5,89E+02	8,41E+01	3,33E+00	0,00E+00	0,00E+00	6,39E+01	6,91E+00	7,94E-01	-7,55E+01
PENRM	[MJ]	1,90E+01	0,00E+00	-1,90E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	[MJ]	6,08E+02	8,41E+01	-1,57E+01	0,00E+00	0,00E+00	6,39E+01	6,91E+00	7,94E-01	-7,55E+01
SM	[kg]	2,65E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	[m ³]	6,45E-01	1,25E-02	2,00E-03	0,00E+00	0,00E+00	9,49E-03	5,64E-04	1,11E-04	-3,97E-01
Caption	<p>PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water</p> <p>The numbers are declared in scientific notation, fx 1,95E+02. This number can also be written as: 1,95*10² or 195, while 1,12E-11 is the same as 1,12*10⁻¹¹ or 0,0000000000112.</p>									

WASTE CATEGORIES AND OUTPUT FLOWS PER TONNE										
Parameter	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
HWD	[kg]	2,00E-02	5,30E-04	2,23E-05	0,00E+00	0,00E+00	4,03E-04	4,56E-05	4,62E-06	-5,01E-04
NHWD	[kg]	1,09E+01	6,87E+00	3,78E-01	0,00E+00	0,00E+00	5,22E+00	4,42E-03	1,00E+01	-1,16E+00
RWD	[kg]	1,29E-03	2,19E-05	9,62E-07	0,00E+00	0,00E+00	1,67E-05	6,85E-07	3,82E-07	-2,94E-04
CRU	[kg]	0,00E+00	0,00E+00	2,65E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	[kg]	0,00E+00	0,00E+00	1,18E-01	0,00E+00	0,00E+00	0,00E+00	9,90E+02	0,00E+00	0,00E+00
MER	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	[MJ]	0,00E+00	0,00E+00	5,20E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EET	[MJ]	0,00E+00	0,00E+00	1,71E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Caption	<p>HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy</p> <p>The numbers are declared in scientific notation, fx 1,95E+02. This number can also be written as: 1,95*10² or 195, while 1,12E-11 is the same as 1,12*10⁻¹¹ or 0,0000000000112.</p>									

BIOGENIC CARBON CONTENT PER TONNE		
Parameter	Unit	At the factory gate
Biogenic carbon content in product	[kg C]	0,00E+00
Biogenic carbon content in accompanying packaging	[kg C]	1,07E+01
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO ₂	

Additional information

GWP-GHG

GWP-GHG is equal to GWP-total, except that the characterization factor for biogenic CO₂ emissions is set to zero.

GHG IMPACT PER TONNE										
Parameter	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
GWP-GHG	[kg CO ₂ eq.]	5,81E+01	5,26E+00	1,02E+00	0,00E+00	0,00E+00	3,99E+00	5,03E-01	5,82E-02	-4,77E+00

LCA interpretation

Process CO₂ from firing, biomethane use and emissions of nitrogen oxides show repeatedly high impacts across most core environmental indicators during the production in A1-A3. The use of sawdust and pallets creates a significant biogenic carbon flows (uptake in A1/A3 and re-emission in A3/A5). Transport effects in A2 and A4 are generally modest.

Technical information on scenarios

Transport to the building site (A4)

Scenario information	Value	Unit
Fuel type	Diesel	-
Vehicle type	Truck, >32 metric ton, EURO6	-
Transport distance	50	km
Capacity utilisation (including empty runs)	44,3	%
Gross density of products transported	1500-1750	kg/m ³
Capacity utilisation volume factor	-	-

Installation of the product in the building (A5)

Scenario information	Value	Unit
Packaging waste	5,94	kg
Packaging reused	26,50	kg

Reference service life

RSL information		Unit
Reference service Life	150	Years
Declared product properties	Declaration of Performance	
Design application parameters	Technical information	
Assumed quality of work	Installation and maintenance manuals	
Outdoor environment	Technical information	
Indoor environment	SBI 2009:1	
Usage conditions	Technical information	
Maintenance	Internal Guidance Document on TBE PCR for Clay Construction Products (2020)	

Use (B1-B7)

No environmental impacts.

End of life (C1-C4)

Scenario information	Value	Unit
Collected separately	1000	kg
Collected with mixed waste		kg
For reuse		kg
For recycling	990	kg
For energy recovery		kg
For final disposal	10	kg
Assumptions for scenario development	TBE PCR	As appropriate

Re-use, recovery and recycling potential (D)

Scenario information/Material	Value	Unit
Recycled as gravel	990	kg
Energy recovery from waste incineration	69,06	MJ


Indoor air

The EPD does not give information on release of dangerous substances to indoor air because the horizontal standards on the relevant measurements are not available. Read more in EN15804+A2 chapter 7.4.1.

Soil and water

The EPD does not give information on release of dangerous substances to soil and water because the horizontal standards on the relevant measurements are not available. Read more in EN15804+A2 chapter 7.4.2.

References

Publisher	 epddanmark www.epddanmark.dk <small>Template version 2025.1</small>
Programme operator	Danish Technological Institute Gregersensvej DK-2630 Taastrup www.teknologisk.dk
LCA-practitioner	<i>Hans Jurie Potgieter</i> Ecochain Technologies BV H.J.E. Wenckebachweg 123, 3B 1096 AM Amsterdam, Netherlands
LCA software /background data	Ecochain Helix 4.3.1 Ecoinvent 3.11 EN 15804 reference package 3.1
3rd party verifier	<i>Nana Lin Rasmussen</i> Lin Consulting ApS Verified according to Verification Checklist 1 v. 2.9.1

General programme instructions

General Programme Instructions, version 3.0, spring 2025

www.epddanmark.dk

Technical Rules and Guidelines

Technical Rules and Guidelines, version 1.0, spring 2025

www.epddanmark.dk

EN 15804

DS/EN 15804 + A2:2019 - "Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products"

Tiles & Bricks Europe (2020)

Internal Guidance Document on TBE PCR for Clay Construction Products

EN 16449

DS/EN 16449:2014 – "Wood and wood-based products - Calculation of the biogenic carbon content of wood and conversion to carbon dioxide"

EN 15942

DS/EN 15942:2011 – “Sustainability of construction works – Environmental product declarations – Communication format business-to-business”

ISO 14025

DS/EN ISO 14025:2010 – “Environmental labels and declarations – Type III environmental declarations – Principles and procedures”

ISO 14040

DS/EN ISO 14040:2008 – “Environmental management – Life cycle assessment – Principles and framework”

ISO 14044

DS/EN ISO 14044:2008 – “Environmental management – Life cycle assessment – Requirements and guidelines”